

1. About this Document

This document describes the activities related to the creation of a PV plant, set-up and commissioning of a Solplanet inverter and connecting the Solplanet inverter to a WiFi network.

The contents of this quick guide apply to the following models:

- ASWx000S-S
- ASWx000-S
- ASWx000-T
- ASWxxK-LT
- ASWxxK-LT-G2
- ASW TLCx000

The firmware of the Solplanet WiFi stick should be 19B01-0021R or greater. Please contact the Solplanet service team in your region if in doubt.

2. Items Required

- Solplanet inverter with a WiFi stick
- WiFi stick with firmware greater than 19B01-0021R
- iOS or Android based mobile device
- Solplanet app

3. Before Using the App

Please ensure the following has been completed before using this quick guide:

- A Solplanet inverter installed as per the Solplanet guidelines
- A Solplanet WiFi stick has been connected to the inverter
- The inverter has been connected to a string of solar panels of the appropriate voltage or to a DC power source
- The inverter DC switch is in the "ON" position
- Ensure the WiFi stick's green LED is solid ON and the blue LED is OFF

If the blue LED is solid ON before your first attempt to begin, the WiFi stick may have already connected to a WiFi network. Please contact the Solplanet service team in your region if this is the case.

4. WiFi Stick LED Indicators

There are two LED indicators on the WiFi stick, the state of each LED indicator is defined in the table below:

	Solid OFF	Solid ON	Blinking
<b>Green LED</b>	<ul style="list-style-type: none"> <li>• WiFi stick is OFF</li> </ul>	<ul style="list-style-type: none"> <li>• WiFi stick is ON</li> </ul>	<ul style="list-style-type: none"> <li>• NA</li> </ul>
<b>Blue LED</b>	<ul style="list-style-type: none"> <li>• Not connected to WiFi</li> <li>• ASW-XXXX access point is ON</li> </ul>	<ul style="list-style-type: none"> <li>• Connected to WiFi</li> <li>• ASW-XXXX access point is OFF</li> </ul>	<ul style="list-style-type: none"> <li>• Connected to WiFi</li> <li>• ASW-XXXX access point is OFF</li> <li>• Data cannot be sent to server</li> </ul>

5. App Download

To download the Solplanet app, please scan the appropriate QR code below.



Android




iOS

6. Account Registration


An account can be created in the following ways:

- Tapping on "Do not have an account?" on the login screen of the app, selecting the appropriate user type and following the prompts
- Registration is possible using either an email or a registered cellular phone number

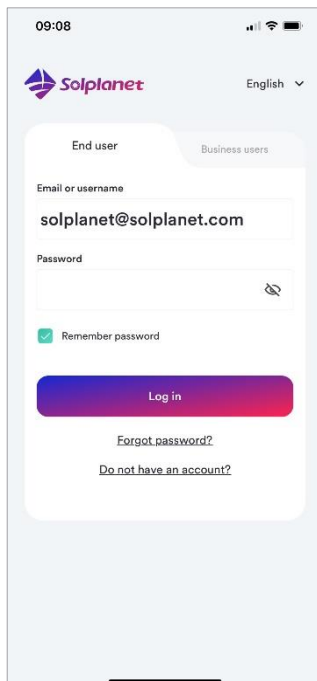

- Log into the App after the account has been registered.

7. Create PV Plant

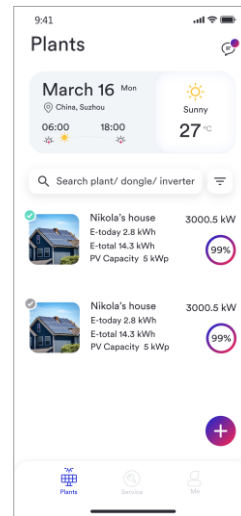


1. Tap "+"




2. Tap "Create or modify a plant"




3. Scan WiFi stick QR code or manually enter the serial number and the registration code

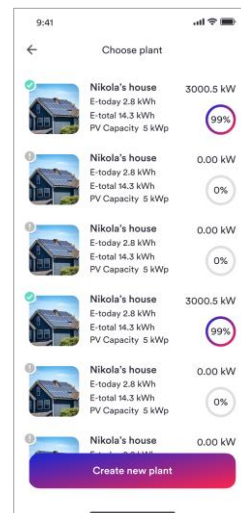

4. Tap "Create new plant"

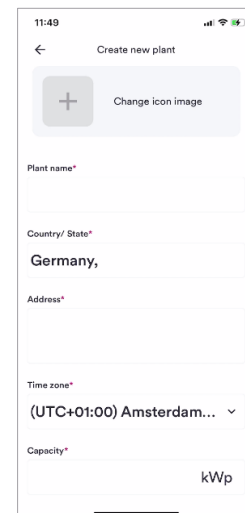


5. Enter PV plant information in all fields marked with a red asterisk and tap "Create"  
6. Optional: turn on the App location services

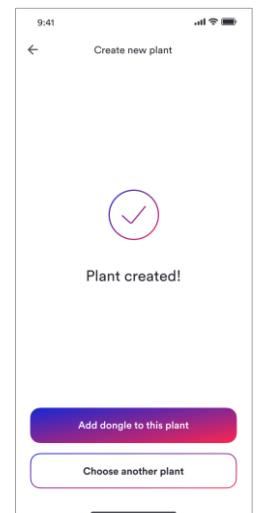


7. Tap "Add dongle to this plant"


## 8. Inverter Set-up

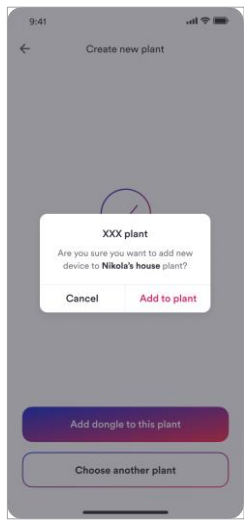


8. Tap "Add to plant"

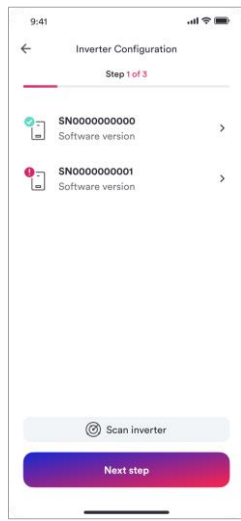


9. Tap the inverter serial number that matches your inverter – TIP: tap "Scan inverter" if the inverter is displayed as "Unknown"

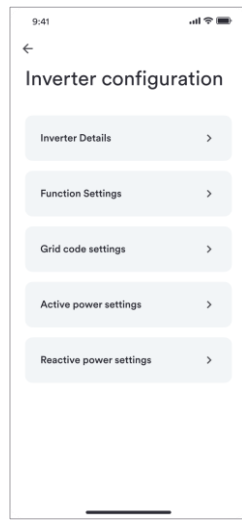


10. Tap "Grid" code settings"

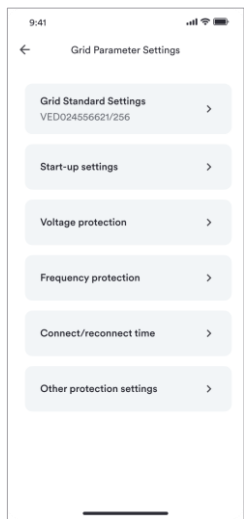


11. Tap "Grid code settings"

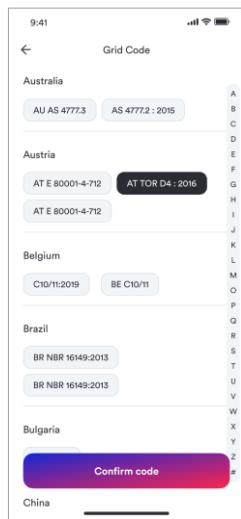


12. Select the correct grid code and tap "Save"  
13. Tap return arrow three times to return to inverter list

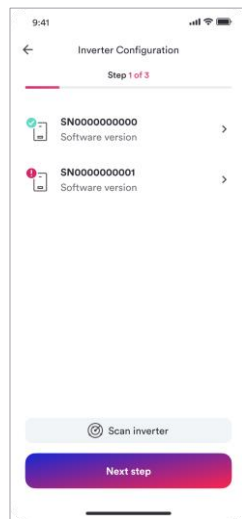


14. Tap "Next step"

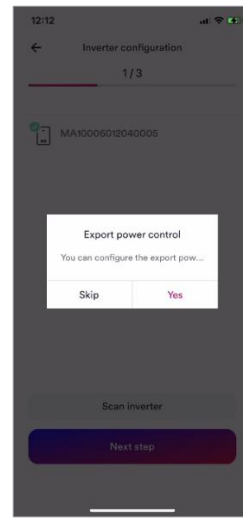


15. To set up export power limitation or consumption monitoring tap "Yes" otherwise tap "Skip" and proceed to step 21

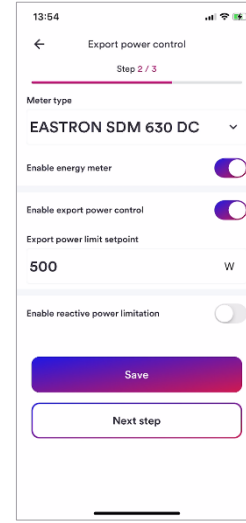


16. Select meter type  
17. Enable energy meter  
18. Enable export power control  
19. Enter "Export Power Limit Setpoint" in watts (W)  
20. Tap "Save"  
21. Tap "Next step"

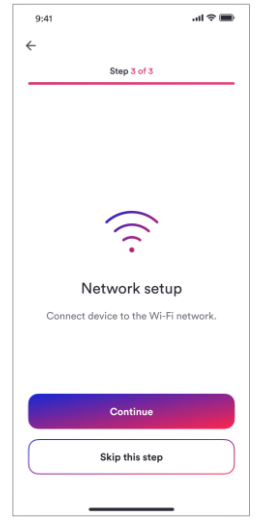


22. Tap "Continue"

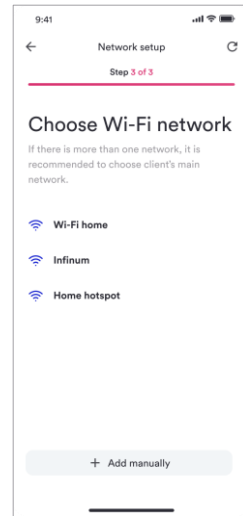

23. Select WiFi network from list

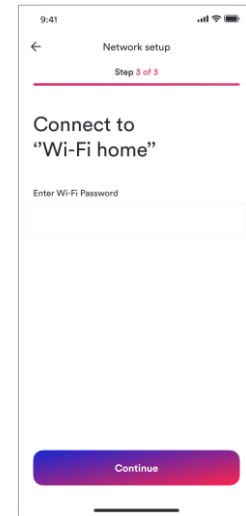


24. Enter WiFi password and tape "continue"

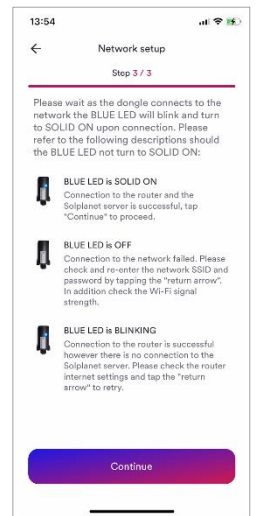

25. Follow the prompts on the page to confirm whether the dongle is configured with a network. If the BLUE LED is SOLID ON, click "Continue". Otherwise, go back to the previous step.

4

5

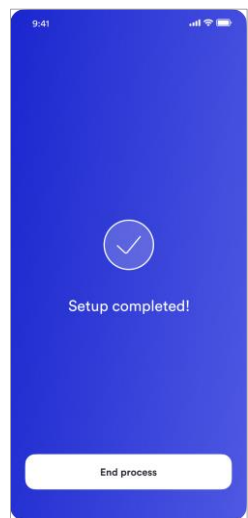

26. Setup is now completed, tap "End process" and the PV plant will now be shown on the PV plant list.

## 9. Contact

If you have any technical problems with our products, please contact our service. Provide the following information to assist in providing you with the necessary assistance:

- Inverter device type
- Inverter serial number
- Type and number of connected PV modules
- Error code
- Mounting location
- Warranty card
- Mobile device type

**SOLPLANET INTERNATIONAL**  
service@solplanet.net

**SOLPLANET AUSTRALIA**  
Service: +61 390 988 674  
service.au@solplanet.net

**SOLPLANET BRAZIL**  
Support: +55 51 99765 3389

**SOLPLANET GERMANY**  
Service: +31 20 800 4844  
service.eu@solplanet.net

**SOLPLANET HUNGARY**  
Service: +36 465 00 384  
service.hu@solplanet.net

**SOLPLANET KOREA**  
Service: +82 31 422 8110  
Service.kr@solplanet.com

**SOLPLANET POLAND**  
Service: +48 13 4926 109  
service.pl@solplanet.net

**SOLPLANET SOUTH AFRICA**  
service@solplanet.com

**SOLPLANET SPAIN**  
Service: +31 20 800 4844 (EN)  
service.eu@solplanet.net

**SOLPLANET SWEDEN**  
Service: +31 20 800 4844 (EN)  
service.eu@solplanet.net

**SOLPLANET THE NETHERLANDS**  
Service: +31 20 800 4844 (EN)  
service.eu@solplanet.net

**SOLPLANET TURKEY**  
Service: +90 850 346 00 24  
service.tr@solplanet.net

**AISWEI GREATER CHINA**  
Service: +86 400 801 9996  
[service.china@aiswei-tech.com](mailto:service.china@aiswei-tech.com)

6

7