

# WallGard Graffiti REMOVER GEL

Gel Detergent For Cleaning Graffiti-Damaged Surfaces



## WHERE TO USE

Cleaning of all surfaces not previously treated with graffiti-resistant protection against conventional spray-paints.

### Some application examples

Removal of graffiti from:

- all types of natural stone facings;
- brick or concrete block facings;
- concrete facings;
- unpainted renders;
- unpainted metal surfaces;
- areas where high-pressure cleaning is not practical.

## TECHNICAL CHARACTERISTICS

**WallGard Graffiti Remover Gel** is a gel detergent based on a formula developed in MAPEI's own laboratories. **WallGard Graffiti Remover Gel** removes all types of graffiti without damaging the underlying surface simply by spraying with a high pressure cleaner.

Its gelatinous consistency enables **WallGard Graffiti Remover Gel** to remain on the surface of the graffiti without transporting the stain beneath the surface.

**WallGard Graffiti Remover Gel** works in 5 to 10 minutes, after which time it can be removed with water.

## RECOMMENDATIONS

- Do not dilute **WallGard Graffiti Remover Gel** with solvents or water.
- Do not use **WallGard Graffiti Remover Gel** to remove residues and adhesives from the substrate.
- Do not use **WallGard Graffiti Remover Gel** to remove dirt deposited by smog.
- Do not use **WallGard Graffiti Remover Gel** on painted surfaces.

## HOW TO USE

### Preparing the substrate

No preparation is required.

### Preparing the product

**WallGard Graffiti Remover Gel** is ready to use and should not be diluted with water or solvents.

### Applying the product

Apply **WallGard Graffiti Remover Gel** with a brush onto the graffiti or drawing.

Let stand 5 to 10 minutes and then remove the gel with a high-pressure cleaner.

In areas where using a high-pressure cleaner is not practical, **WallGard Graffiti Remover Gel** can be removed with tap water and a stiff-bristled brush.

Repeat the operation if the results are unsatisfactory. Rinse the treated surface thoroughly with water.



Applying WallGard Graffiti Remover Gel with a brush



Applying WallGard Graffiti Remover Gel with a brush




Cleaning with an abrasive pad



Cleaning with running water



Using a high-pressure cleaner

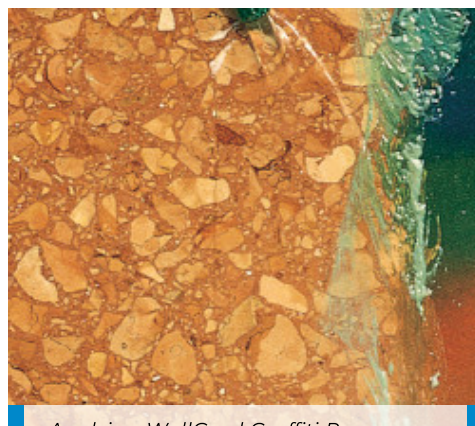

Applying WallGard Graffiti Remover Gel on natural stone

## CLEANING

Brushes used to apply **WallGard Graffiti Remover Gel** can be cleaned with water.

## COVERAGE

100 to 200 g/m<sup>2</sup> per coat, depending on the texture of the surface.

## PACKAGING

5-kg buckets.

## STORAGE

12 months in a cool, dry place in original sealed packaging.

## SAFETY INSTRUCTIONS FOR PREPARATION AND APPLICATION

Instructions for the safe use of our products can be found on the latest version of the SDS available from our website [www.mapei.com](http://www.mapei.com).

PRODUCT FOR PROFESSIONAL USE.

## TECHNICAL DATA (typical values)

### PRODUCT IDENTITY

Consistency:	liquid gel
Colour:	yellow
Density (g/cm <sup>3</sup> ):	0.85
Inflammability:	no

### APPLICATION DATA

Waiting time before removing:	5 to 10 minutes at +20°C
Application temperature range:	+8°C to +35°C
Coverage (g/m <sup>2</sup> ):	100 to 200

## WARNING

*Although the technical details and recommendations contained in this product data sheet correspond to the best of our knowledge and experience, all the above information must, in every case, be taken as merely indicative and subject to confirmation after long-term practical application: for this reason, anyone who intends to use the product must ensure beforehand that it is suitable for the envisaged application: in every case, the user alone is fully responsible for any consequences deriving from the use of the product.*

**Please refer to the current version of the Technical Data Sheet, available from our web site [www.mapei.com](http://www.mapei.com)**

## LEGAL NOTICE

*The contents of this Technical Data Sheet ("TDS") may be copied into another project-related document, but the resulting document shall not supplement or replace requirements per the TDS in force at the time of the MAPEI product installation.*

*The most up-to-date TDS can be downloaded from our website [www.mapei.com](http://www.mapei.com).*

**ANY ALTERATION TO THE WORDING OR REQUIREMENTS CONTAINED OR DERIVED FROM THIS TDS EXCLUDES THE RESPONSIBILITY OF MAPEI.**

**341-10-2023-gb**

Any reproduction of texts, photos and illustrations published here is prohibited and subject to prosecution

