

**GIESSBETON 3-PUNKT AUFLAGE** with shuttlecock clip**Description**

Spacer with 3-point support made of cast concrete. With shuttlecock clip for easy attachment to the reinforcement. The shuttlecock clip ensures a secure hold at the crossing point of the reinforcement. Due to the low contact points with the formwork, very suitable for exposed concrete.

**Application**


The spacer is attached to the reinforcement with the shuttlecock clip. The usability of the product in the respective installation situation must be checked by the user! Further information on the arrangement and installation distances can be found in the relevant DBV leaflets.

**Material**

- Cast concrete
- Free from PVC, CFC and HFC
- Without substances of very high concern according to ECHA candidate list (REACH Regulation)

**Packaging**

- Free of halogen-containing compounds, azo dyes, flame retardants

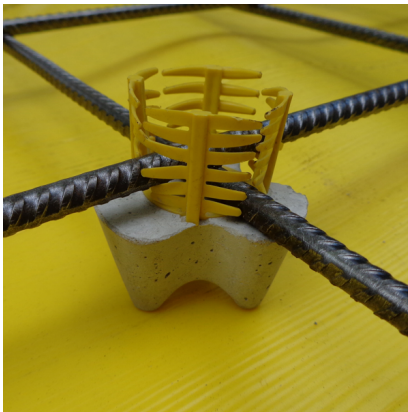

## GIESSBETON 3-PUNKT AUFLAGE with shuttlecock clip

Item no.	Concrete cover mm	For Ø iron mm	Pcs/ Bag	Pcs/ Pallet
GBVA20F	20	4 - 14	384	15.360
GBVA25F	25	4 - 14	384	15.360
GBVA30F	30	4 - 14	320	12.800
GBVA35F	35	4 - 14	256	10.240
GBVA40F	40	4 - 14	192	7.680
GBVA45F	45	4 - 14	147	5.880
GBVA50F	50	4 - 14	147	5.880
GBVA55F	55	4 - 14	147	5.880
GBVA60F	60	4 - 14	144	5.760
GBVA65F	65	4 - 14	108	4.320
GBVA70F	70	4 - 14	72	2.880
GBVA75F	75	4 - 14	72	2.880



For further documents  
scan or click here!

Tested according to DBV leaflet „Abstandhalter“ DBV - c - L2/F/T/A.

