

24V

3000A

GB251+



COMMERCIAL-GRADE LITHIUM JUMP STARTER.™

32L+

GAS AND DIESEL.

It's commercial in every way. It jump starts almost every type of vehicle and equipment, including semi-trucks (up to class 8), motorhomes, coaches, buses, mining, agricultural, construction, and vocational equipment - 6, 8, 12, and 16 cylinder - and more.



60-SECOND TIMER.

An automatic power conservation feature. Start vehicle within 60 seconds. After the 60-second timeout is complete, the unit must be powered off, then back on, to initiate a new jump-start sequence.

2.0


ULTRA SAFE 2.0.

Safe and easy to use battery jump starter pack without the worry of incorrect connections or sparks. Safely connect to any 24-volt battery with our mistake-proof design featuring spark-proof technology and reverse polarity protection.

600 LUMENS

MULTI-FUNCTIONAL.

It's not just a lithium jump starter but also a portable power bank for recharging smartphones, tablets, and other USB devices, with an ultra-bright 600-lumen LED flashlight with seven light modes, including emergency strobe and SOS.

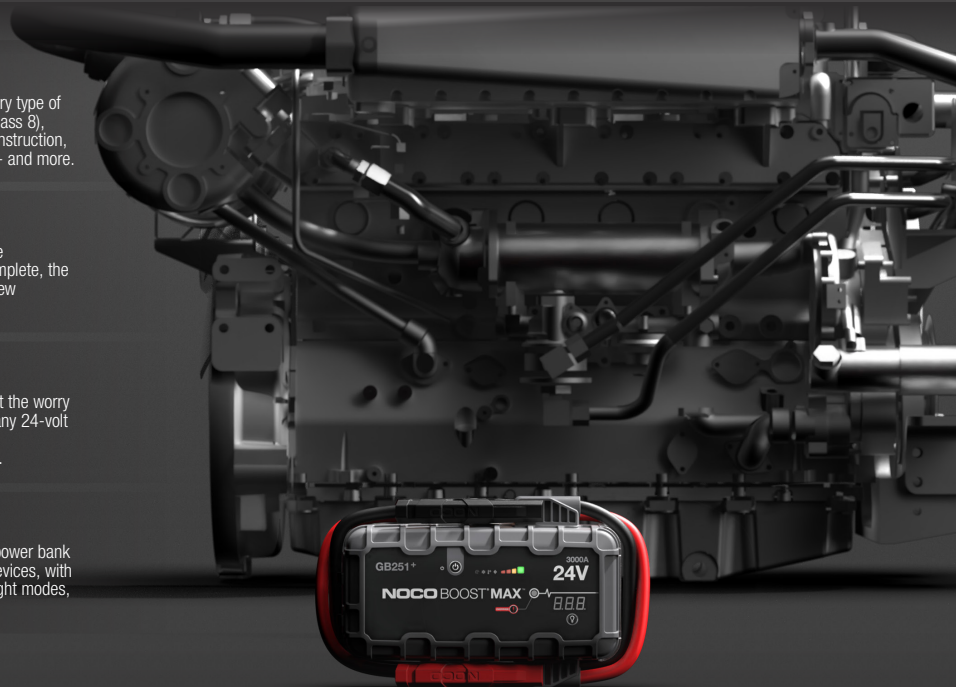

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

LEAD ACID



AUTO | MARINE | RV | POWERSPORT | LAWN & GARDEN



INTERFACE

POWER LED

The charger is in standby or the battery voltage is too low for the charger to detect.



ERROR

Illuminates Red if reverse polarity is detected. Blinks "on" and "off" in various sequences (from 1 to 6 blinks) to convey error conditions.



HOT/COLD INDICATOR

Illuminates solid or flashes blue when internal temperature is too low. Illuminates solid or flashes red when internal temperature is too high.



CHARGE LED

Indicates the charge level of the internal battery.



BOOST LED

Illuminates white when boost is active. The LED flashes white when manual override feature is active.



VOLTMETER

Built-in voltmeter displays the voltage of the vehicle's battery for enhanced diagnostics and troubleshooting.




USB RECHARGE.

Charge virtually any USB device, including smartphones and tablets. Remote power for a wide range of 12V devices including tire pumps, inverters, lights, phone chargers and more.


RECHARGE TIME: 8.5hr

From 0-100% 4X Faster. Charge directly from the vehicle's 12-volt auxiliary port or the XGC4 4-Amp Power Adapter to recharge it's 137 watt-hours lithium-ion battery in 8.5 hours.


WHAT'S IN THE BOX

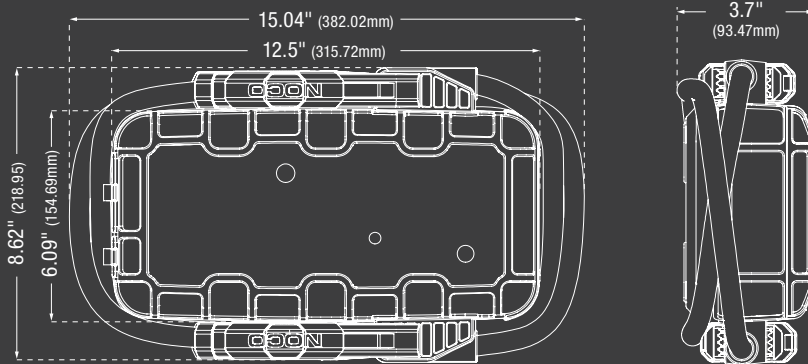


*Accessories not to scale with GB251+




Type A - NA



Type C - EU




12V Cable




XGC-4 Adapter



User Guide



Type G - UK



Type I - AU



EVA Case

TECHNICAL SPECIFICATIONS

INTERNAL BATTERY:	137 Wh Lithium Ion
PEAK CURRENT RATING:	3000A
OPERATING TEMPERATURE:	-4°F to +122°F (-20°C to +50°C)
CHARGING TEMPERATURE:	32°F to +104°F (0°C to +40°C)
12V (INPUT):	12V/5A (14V Max)
12V (OUTPUT):	12V, 15A Max
USB (OUTPUT):	5V, 2.1A Max Each
HOUSING PROTECTION:	IP65 (w/Ports Closed)
COOLING:	Natural Convection
WEIGHT:	13.6 lbs (6.17kg)
VOLUMETRICS:	<p>Inner Carton: Dimensions: 19.49" x 14.17" x 10.51" Weight: 21.83 lbs UPC: 0-46221-19041-0</p> <p>Master Carton: Dimensions: N/A Weight: N/A Quantity: 1 UCC: 00046221190410</p> <p>Units Per Pallet: 56 Units</p>

NOCO

30339 Diamond Parkway, #102
Glenwillow, OH 44139 | USA
1.800.456.6626

no.co

